

# L-TRACK

## INDEX

A short introduction	<b>3</b>
L-TRACK 40	<b>4</b>
L40 End Driven	<b>4</b>
L40 Center Driven	<b>5</b>
L-TRACK 80	<b>6</b>
L80 End Driven	<b>6</b>
L80 Center Driven	<b>7</b>
Gears/Motors	<b>8</b>
Motorplacement	<b>9</b>
Belts	<b>10</b>
Stand/Leg support	<b>11</b>
Additional options	<b>12</b>
Custom L-TRACKS	<b>13</b>
Order	<b>16</b>
Ordering standard L-TRACK	<b>16</b>
Ordering custom L-TRACK	<b>17</b>
Delivered solutions	<b>18</b>

---

**L-SYSTEM AB**  
Mörsaregatan 20  
254 66 Helsingborg  
SWEDEN  
+46 (0)4238 61 50

**L-SYSTEM ApS**  
RomsHule 8 (Østtårnet)  
7100 Vejle  
DENMARK  
+45 53 6971 20

Hi!

## L-TRACK CONVEYORS

A short introduction

---

Our L-TRACK range offers a diverse selection of variants and designs, including belt, roller, and chain conveyors. These systems are engineered for easy customization to meet specific industrial requirements.


The L40 and L80 belt conveyors are the most popular in our lineup, featuring a black PVC belt as standard.

The L-TRACK system is built on our robust S2 profile system (40x40 or 40x80 with T-slot 8), but can also be configured using the BR profile system (T-slot 10). This ensures a flexible and durable solution suitable for a wide array of industrial applications.

We offer a standard solution for gearboxes and motors, but there is always the possibility to customize for other specific requirements.

The majority of components are manufactured in-house, and all assembly is carried out at our workshop (headquarters) in Helsingborg, Sweden.


**Do not hesitate to contact us, and we will gladly provide more information about the extensive possibilities we can offer.**

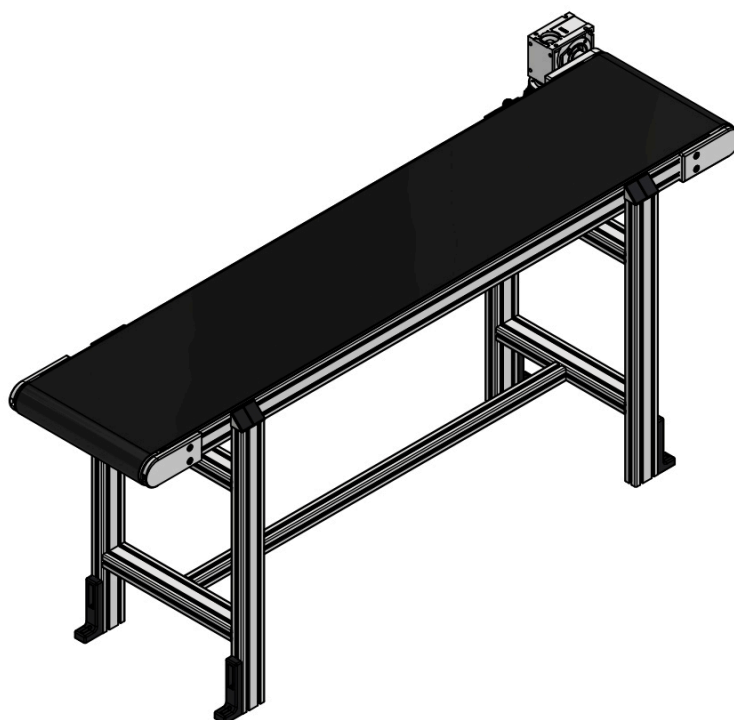



# L-TRACK 40 END DRIVE

Suitable for moving light to medium loads (up to 50kg)

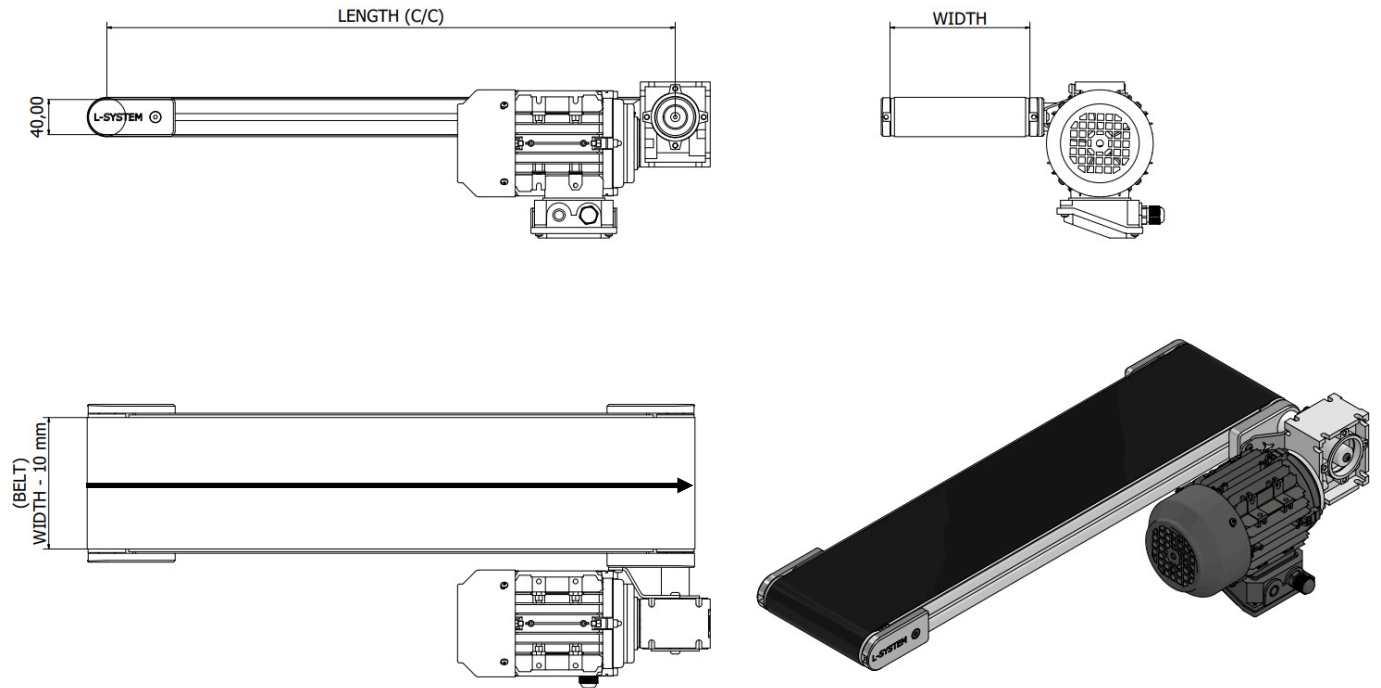

Width (mm)	Length (mm)	Gear ratio (I)	Speed (m/min)	Drive side	Motor pos.
40	Up to 4000	5	37,3	Right/Left	Horizontal/ Vertical (1-4)
80		7,5	24,9		
120		10	18,7		
160		15	12,4		
200		20	9,4		
250		25	7,5		
300		30	6,2		
350		40	4,7		
400		50	3,7		
500					


**Note!** The table above shows what is considered standard. However, it is possible to adjust the length, width and speed to better suit your area of use/application. Even adjustments for increased loads.

Common requests		
Stand/Leg support* 	Side guard (bent sheet metal)* 	Slatted belt* 

L40C

**L-TRACK 40 CENTER DRIVE**

Suitable for reversible movement of light to medium loads (up to 70kg)

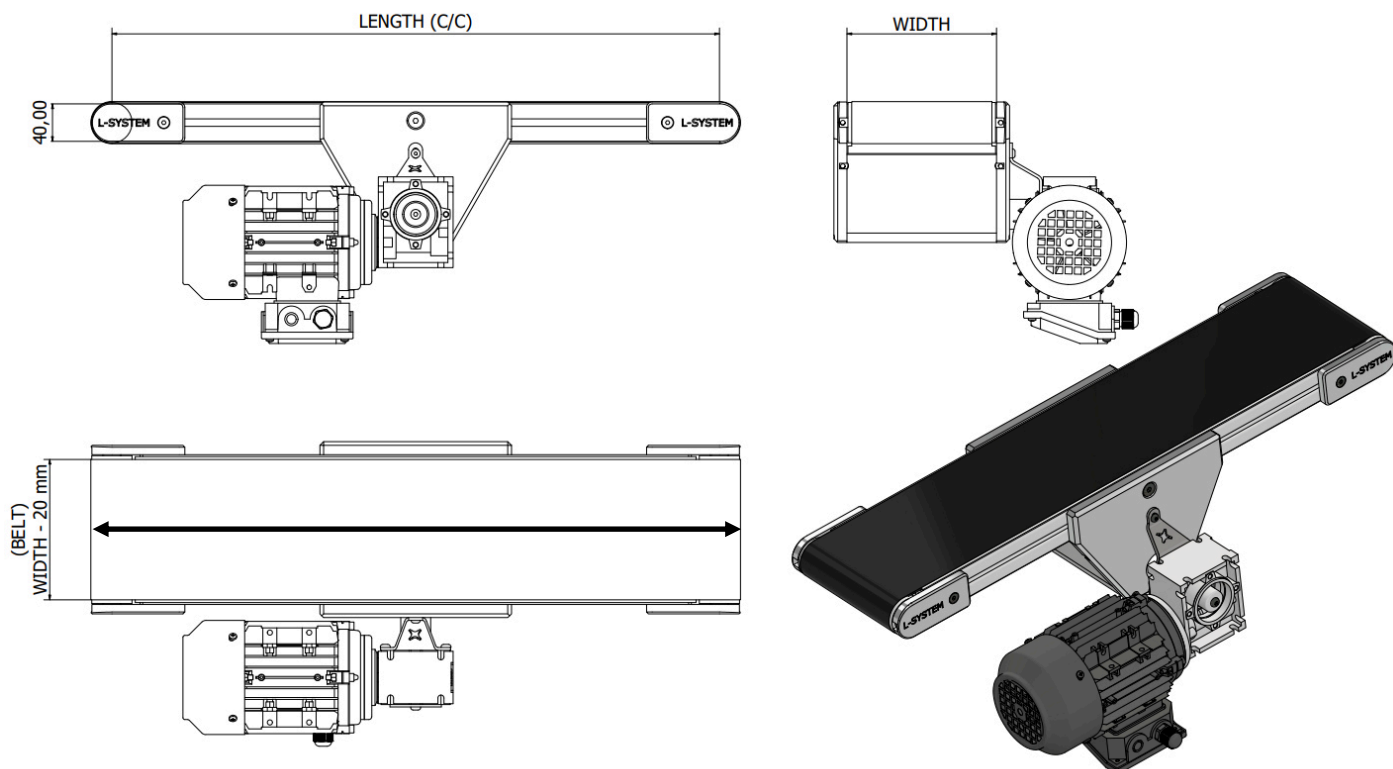


Width (mm)	Length (mm)	Gear ratio (I)	Speed (m/min)	Drive side	Motor pos.
40	Up to 6000	5	37,3	Right/Left	Horizontal/ Vertical (1-4)
80		7,5	24,9		
120		10	18,7		
160		15	12,4		
200		20	9,4		
250		25	7,5		
300		30	6,2		
350		40	4,7		
400		50	3,7		
500					


**Note!** The table above shows what is considered standard. However, it is possible to adjust the length, width and speed to better suit your area of use/application. Even adjustments for increased loads.

**Common requests**

Side guard (bent sheet metal)\*

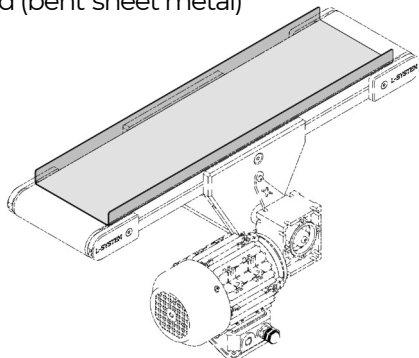

Stand/Leg support\*

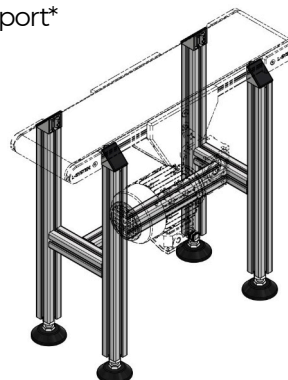


\*Deviations may occur.



## L-TRACK 80 END DRIVE

Suitable for moving medium to heavy loads (up to 200 kg)

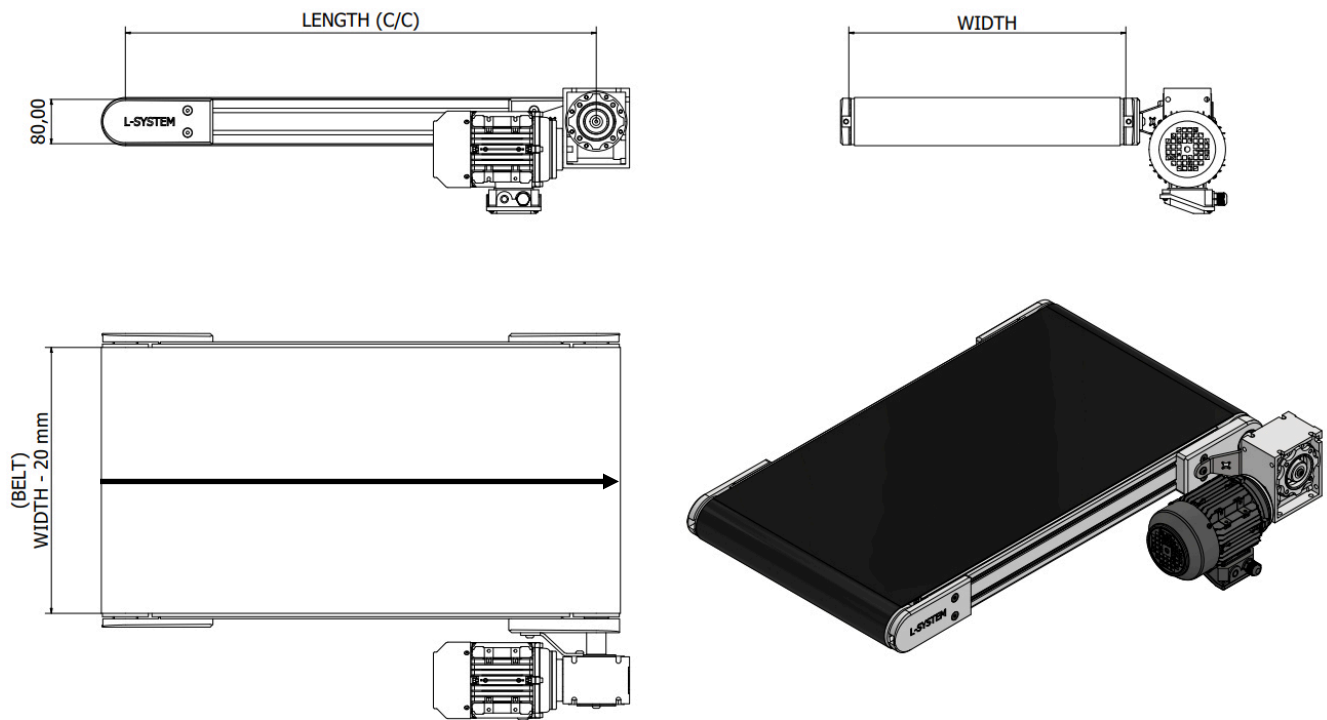

Width (mm)	Length (mm)	Gear ratio (I)	Speed (m/min)	Drive side	Motor pos.
500	Up to 6000	10	36,2	Right/Left	Horizontal/ Vertical (1-4)
600		15	24,3		
700		20	18,2		
800		25	14,5		
900		30	12,2		
1000		40	9,3		
		50	7,4		
		60	6,1		
		80	4,5		
		100	3,7		


**Note!** The table above shows what is considered standard. However, it is possible to adjust the length, width and speed to better suit your area of use/application. Even adjustments for increased loads.

Common requests		
Stand/Leg support*	Side guard (bent sheet metal)*	Slatted belt*

L80C

## L-TRACK 80 CENTER DRIVE

Suitable for reversible movement of medium to heavy loads (up to 300kg)

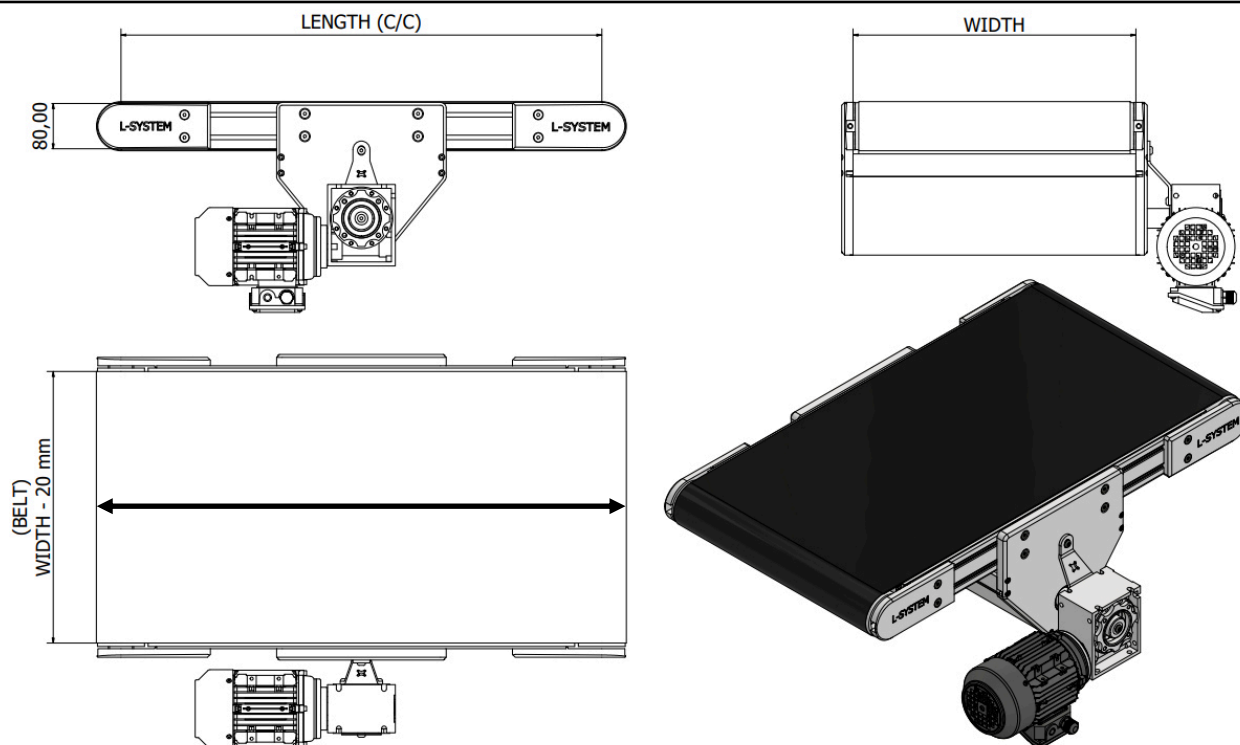


Width (mm)	Length (mm)	Gear ratio (I)	Speed (m/min)	Drive side	Motor pos.
500	Up to 6000	10	36,2	Right/Left	Horizontal/ Vertical (1-4)
600		15	24,3		
700		20	18,2		
800		25	14,5		
900		30	12,2		
1000		40	9,3		
		50	7,4		
		60	6,1		
		80	4,5		
		100	3,7		


**Note!** The table above shows what is considered standard. However, it is possible to adjust the length, width and speed to better suit your area of use/application. Even adjustments for increased loads.

## Common requests

Side guard (bent sheet metal)\*

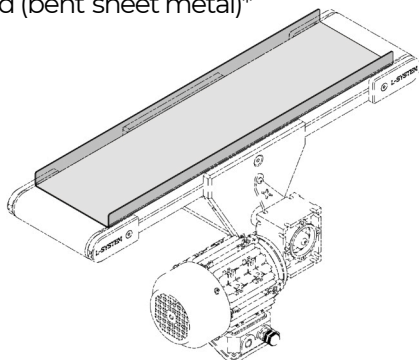

Stand/Leg support\*

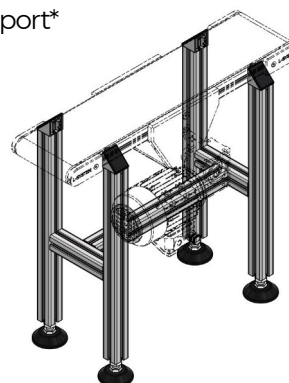


\*Deviations may occur.

**L-TRACK GEARS AND MOTORS**


Gear ratios and speeds

**GEARS****L40-series**

LS030X 63B1 4 H14

**L80-series**

LS050X 71B1 4 H25



Gear ratio (I)	Speed (m/min) <sup>1</sup>
5	37,3
7,5	24,9
10	18,7
15	12,4
20	9,4
25	7,5
30	6,2
40	4,7
50	3,7

Gear ratio (I)	Speed (m/min) <sup>2</sup>
10	36,2
15	24,3
20	18,2
25	14,5
30	12,2
40	9,3
50	7,4
60	6,1
80	4,5
100	3,7

1.) at 1350 rpm.

2.) at 1400 rpm.


**MOTORS****L40-series**

LSA63B-4,0,18KW 230/400V B14 IE2

Frequency Hz: 50

Speed (rpm): 1350

Enclosure: IP55


**L80-series**

LSA71B-4 0,37KW 230/400V B14 IE2

Frequency Hz: 50

Speed (rpm): 1400

Enclosure: IP55

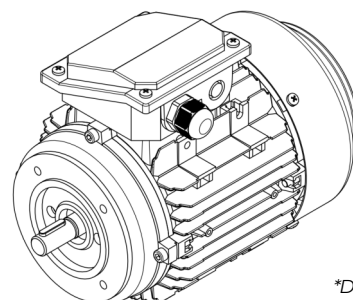

\*Deviations may occur.






## L-TRACK GEARS AND MOTORS


Gear ratios and speeds

### POSITIONING GEAR/MOTOR

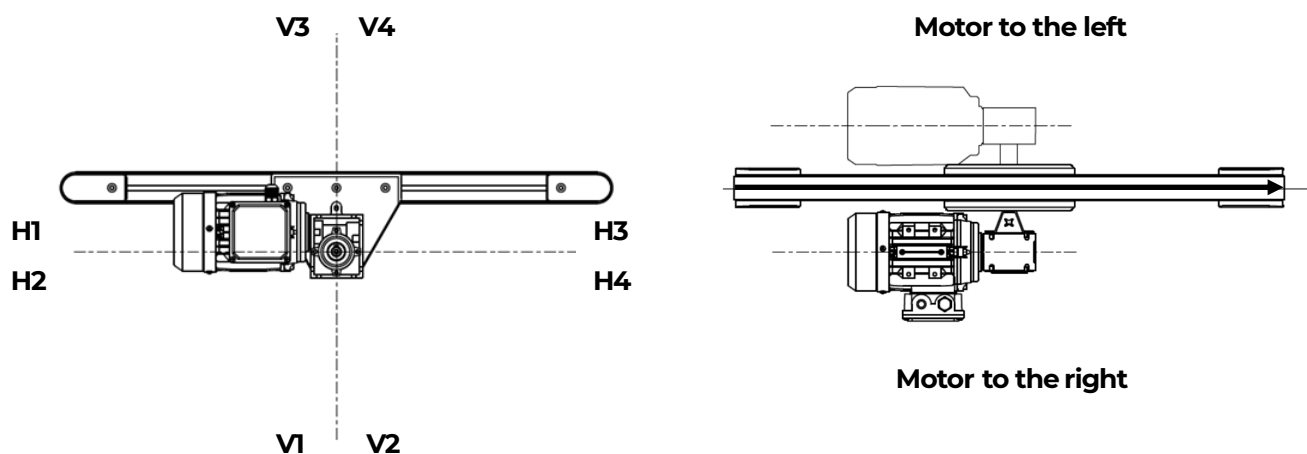


(Example above: RH1, Rightside, position H1)

In tightspaces, it is possible to place the gearbox/motor underneath with the help of a belt drive.

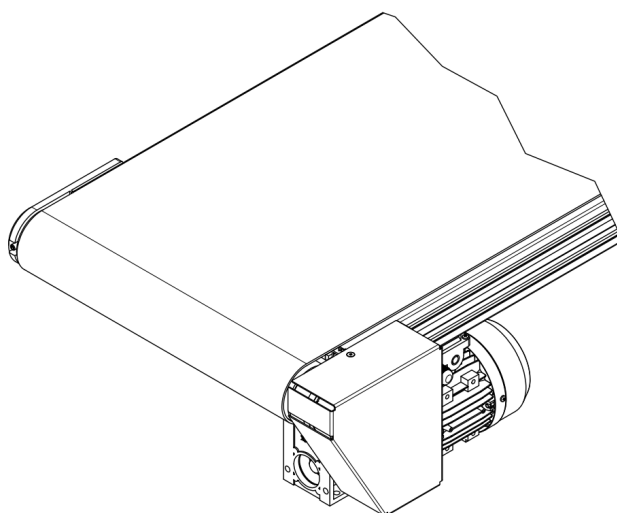

**Note!** Gears and motors are **NOT** mounted upon delivery.



## BELTS

The right belt for the area of use

### BELTS

#### Standard

PVC Black/Green  
General applications

#### Miscellaneous

PVC Blue  
Approved for food handling


PVC Green  
General applications/recycling

Felt Gray  
Suitable for the automotive, wood, paper and glass industry

#### Customized

Slatted  
Separation of products

Guided  
Counteracts lateral forces. Also suitable for long belt conveyors

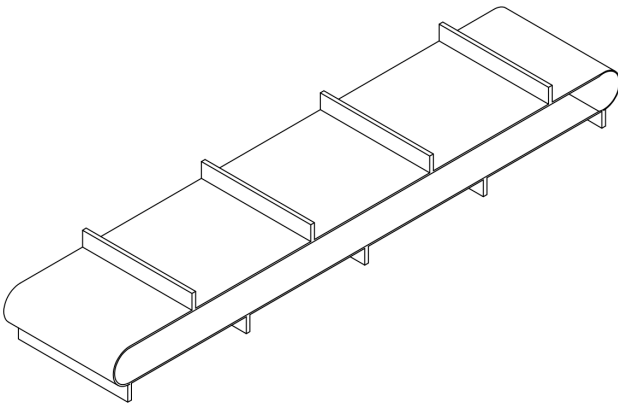

**Note!** Other specialized belts can be provided.


S/L

**STAND AND LEG SUPPORT**


Stability and anchoring

**STAND**


These are constructed using 40-, 80-profiles or a combination of both. They cover most of the transport distance. Suitable for slightly longer conveyors or conveyors moving medium to heavy loads. Adds maximum stability.

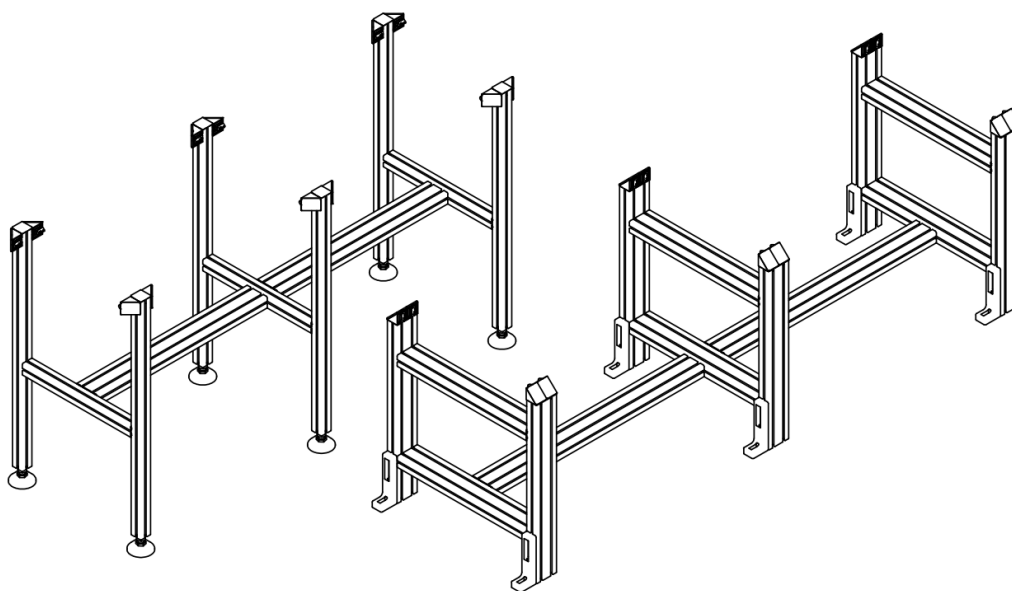**LEG SUPPORT**

These are constructed using 40-, 80-profiles or a combination of both. If necessary, they can be easily adjusted along the transport distance. Suitable for slightly shorter conveyors or conveyors moving light to medium loads. (Also available with height adjustment.)

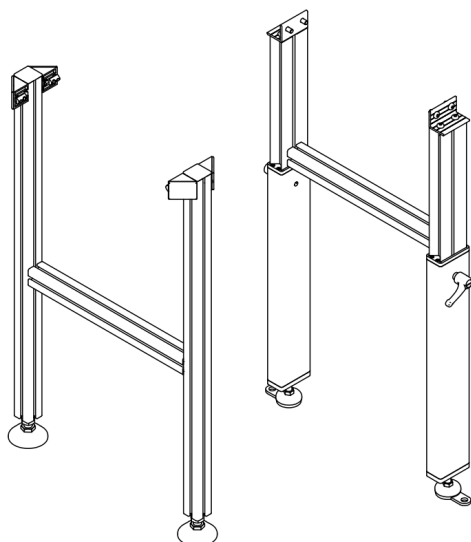**FEET AND WHEELS**

- 1.) Adjustable foot
- 2.) Adjustable foot with floor anchoring
- 3.) Standard foot, semi adjustable with floor anchoring
- 4.) Wheel (with or without locking)


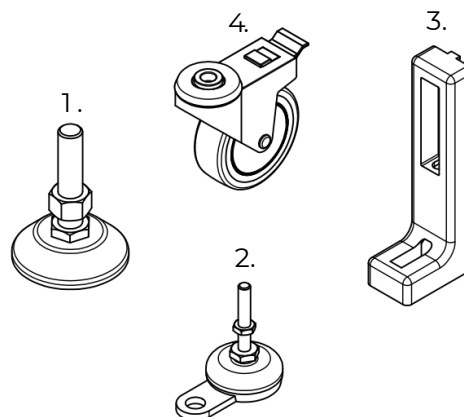


## ADDITIONAL OPTIONS

Further customize the conveyor


### LATERAL GUIDES/SIDE GUARD

Lateral guides can be added to steer or prevent products from rolling off. Either by making the belt plate with folded edges or with guide profiles.

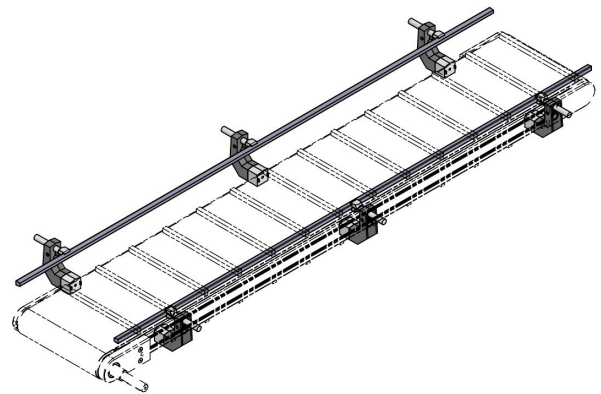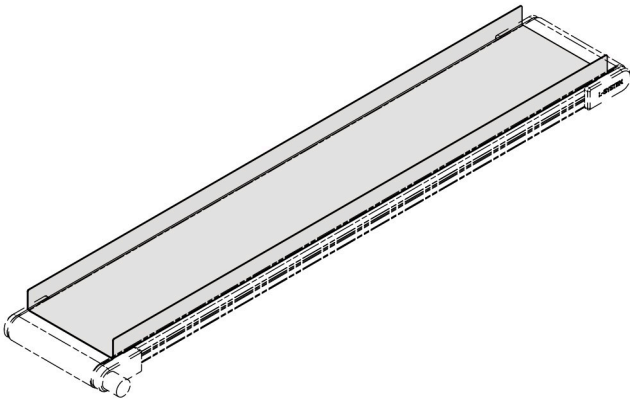


### BELT SCRAPER

Scrapers can help keep the belt clean, e.g. from saw or metal shavings.

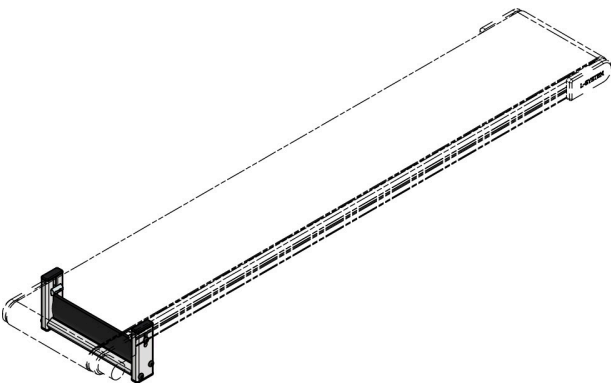

### BELT SUPPORT

Prevents belt sagging. Under certain circumstances standard on conveyors over 3 m.

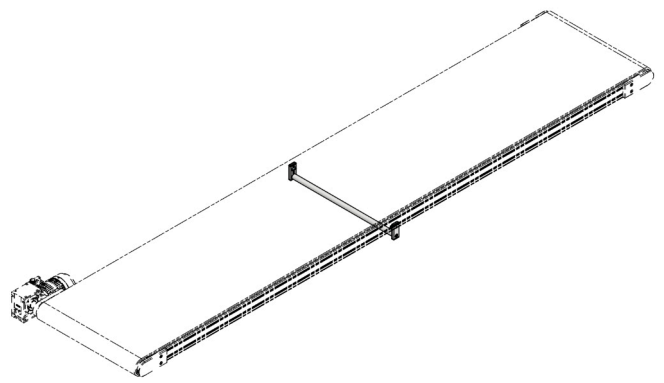

*\*Deviations may occur.*

C


## CUSTOM L-TRACKS

Customized conveyors for specific needs

**Note!** Customized conveyors are ONLY available upon request.

### L40/80/CK L-TRACK 40/80 CENTER DRIVE KNIFE EDGE


Suitable in applications where the transition between two points is important —reversible.

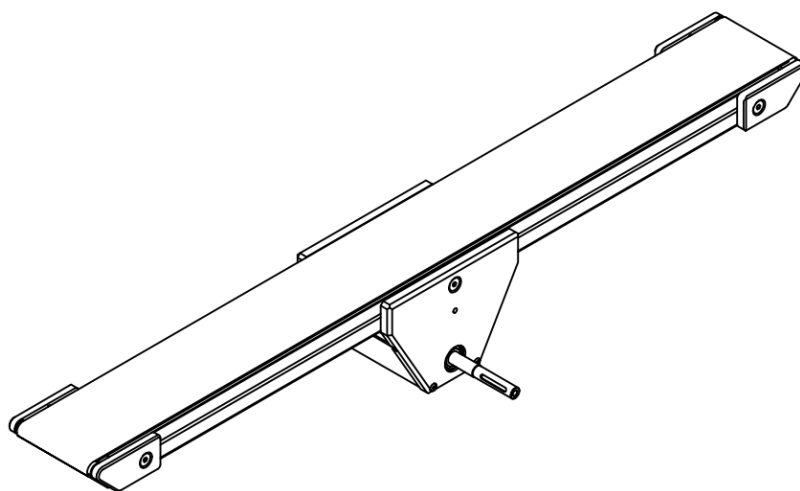


\*L40CK

### L40/80/1 20TM L-TRACK 40/80 TIMING BELT (AT-BELT)

Suitable in applications where positioning and accuracy is crucial —reversible.

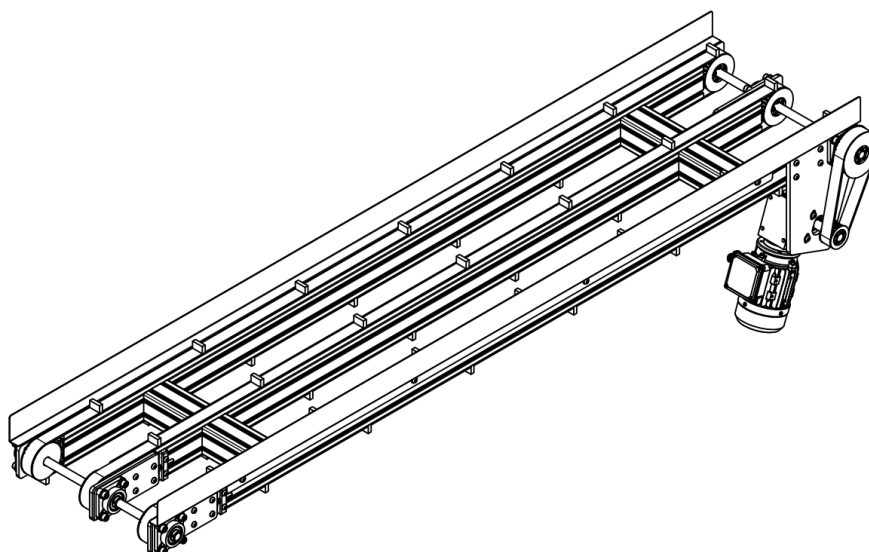

\*3 x L80TM (with side guards, slatted belt and belt driven gear/motor)




## CUSTOM L-TRACKS

Customized conveyors for specific needs

**Note!** Customized conveyors are ONLY available upon request.

### L80DM L-TRACK 80 DRUMMOTOR


Suitable where there is a lack of space (for the gearbox/motor) —non-reversible. Not suitable for heavy loads.

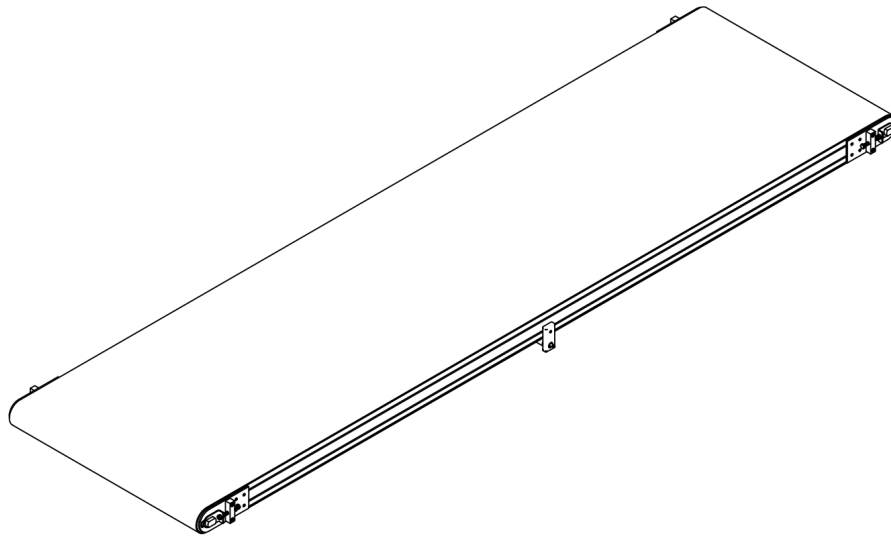


\*L80DM (with belt support)

### L80MB L-TRACK 80 MODULAR BELT

Suitable for food handling environments and applications where a curve is required —non-reversible.

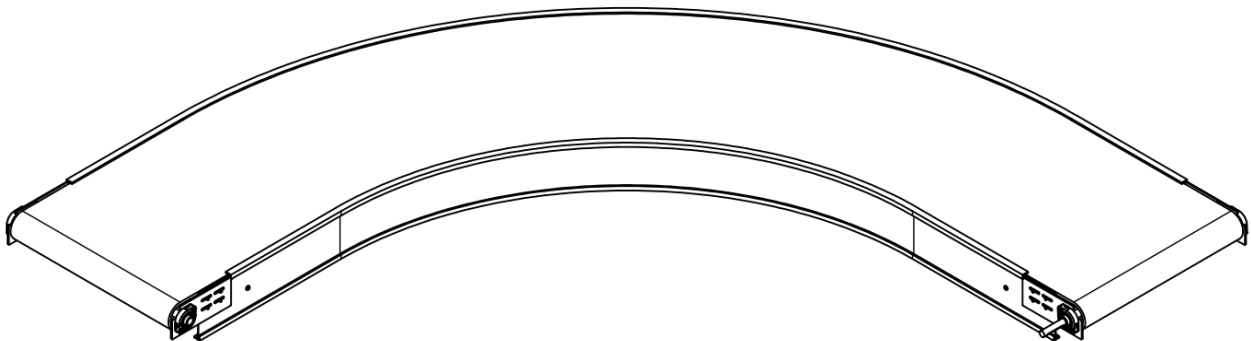

\*L80MB (90°)




## CUSTOM L-TRACKS

Customized conveyors for specific needs

**Note!** Customized conveyors are ONLY available upon request.

### L80HL L-TRACK 80 HEAVY LOAD


Suitable for moving especially heavy loads —non-reversible

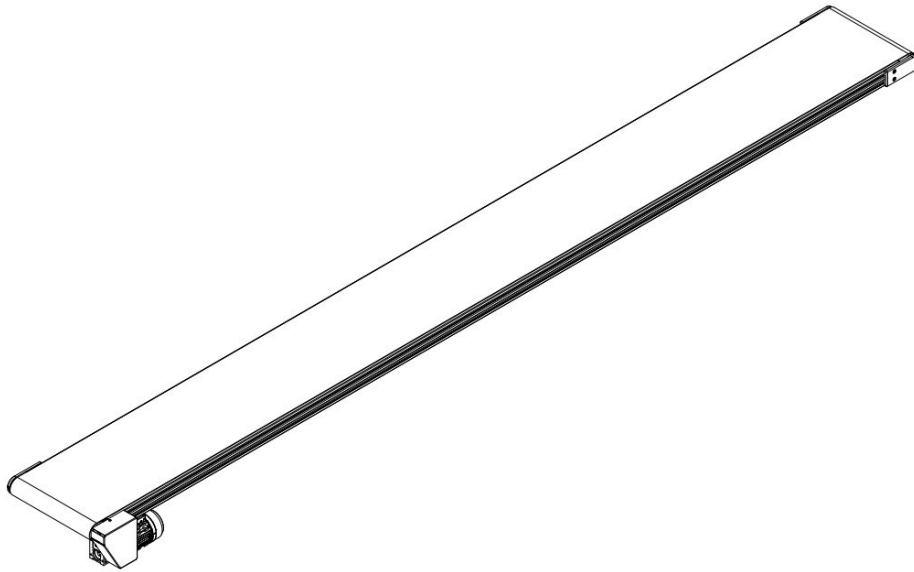


\*L80HL (with belt supports and belt driven gear/motor)

### L50RC L-TRACK 50 ROLLER CONVEYOR

Suitable for boxes and trays.

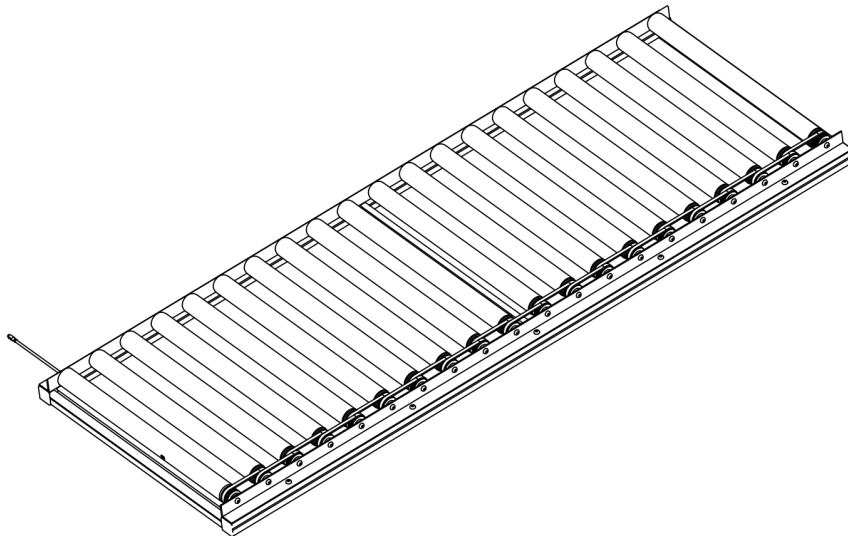

\*L50RC (Driven)



## ORDERING STANDARD CONVEYOR

Configuration and order key for L40/80/E/C

SIZE	L40	-	E	-	0160	-	1000	-	12,4	-	RH1	-	PVCB
L40 L80													
<b>TYPE</b> E = END C = CENTER													
<b>WIDTH</b>													
<b>LENGTH</b> C/C ROLLERS													
<b>SPEED</b>													
<b>POS. GEAR/MOTOR</b>													
<b>BELT COLOR (STD. PVC)</b> B = BLACK G = GREEN													

Ex. above:

### L40E-0160-1000-1 2,4-RH1-PVCB

L-TRACK size 40, end driven, width 160 mm, length 1 000 mm, speed 12,4 m/min, motor placed on the right side position H1, belt (PVC) color black.





?

## ORDERING CUSTOM CONVEYOR

Configuration and order requirements for non-standard

---

For a quotation/order the following information is required:

**L-TRACK Type** (e.g. L40CK)

**Width** (mm)

**Distance between roller** (C/C mm)

**Belt speed** (m/min)





**Belt typ** (e.g. belt for food handling)

**Total load on the belt** (kg/at one time)

**Product** (to be moved)

**Support** (e.g. leg support)

**Support floor anchoring** (e.g adjustable foot with floor bolt)

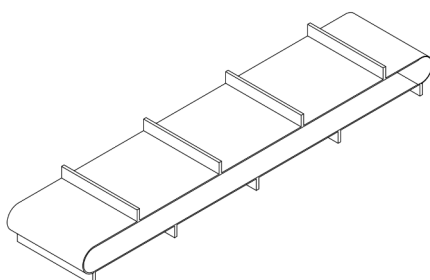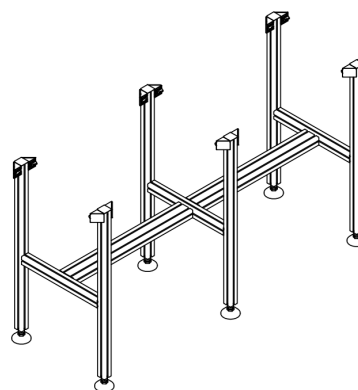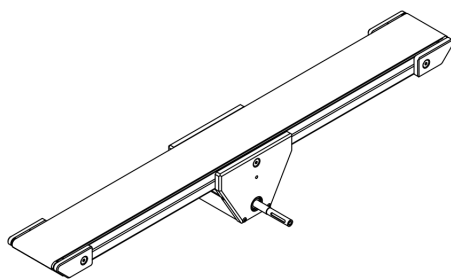

**DELIVERED SOLUTIONS**


Previously delivered projects/orders

**PACKAGING/WOOD INDUSTRY****Case**

Customer wanted a solution where they would be able to move and feed packaged wooden parts further down a production line. Being able to adjust for different sizes of the packaging (up to 2 meters in length) was also a requirement.

**Solution**

Five parallel L40C followed by an additional five parallel L40E, placed slightly offset to guarantee the transition of the product between the conveyors. The adjustment for the different packages was done using guide plates mounted on air cylinders. The entire installation had a dimension of approx. 2.5 x 2.5m.

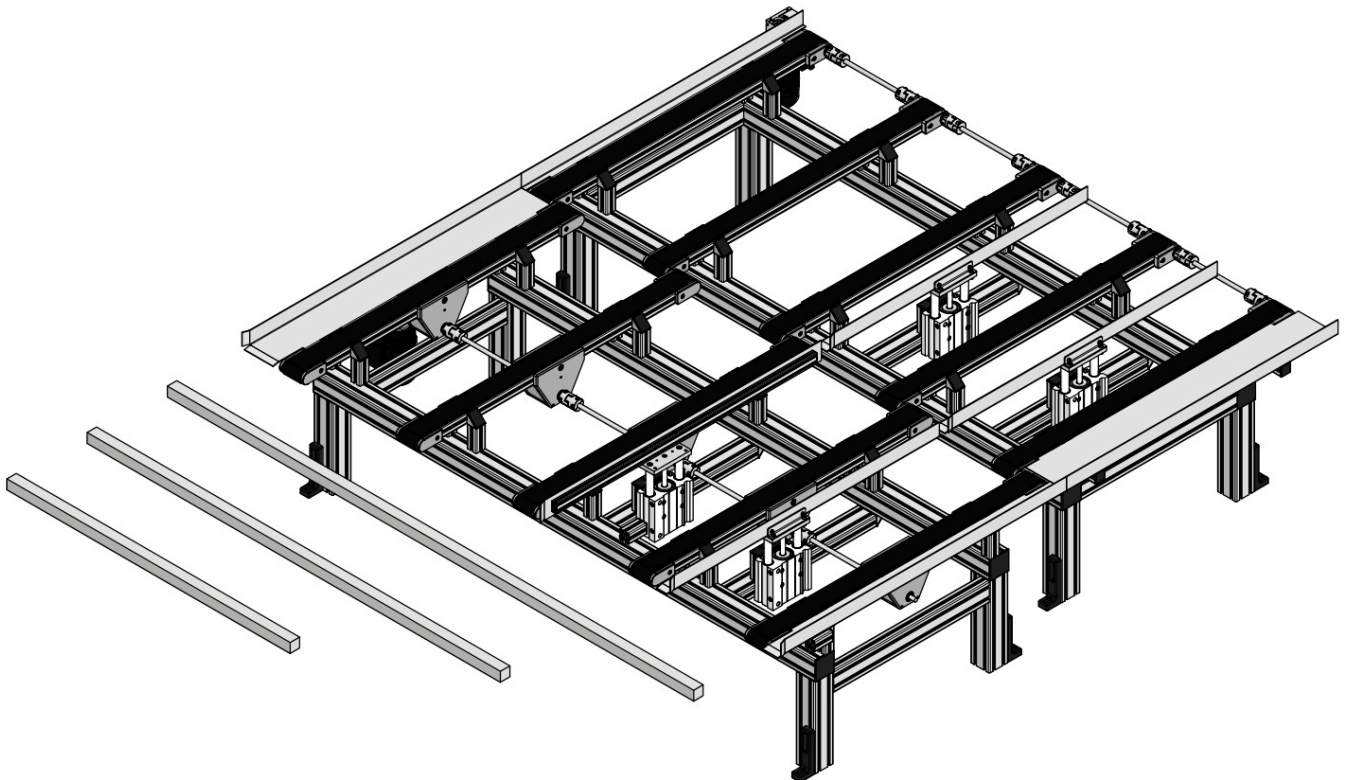

## D

**DELIVERED SOLUTIONS**


Previously delivered projects/orders


**PACKAGING INDUSTRY****Case**

One of Sweden's largest distributors of letters and parcels wanted a complete line for handling return goods. A location and building were already in place, so the dimensions of the solution were already somewhat determined. There were also requirements for suitable work space and the overall budget.

**Solution**

The solution was a total of 186 conveyors where the majority of these were drum-motor-driven (5m/unit). The choice to use this type of conveyor was mainly to create more work space but also to keep costs down. Each conveyor was calculated to handle approx. 60 kg.

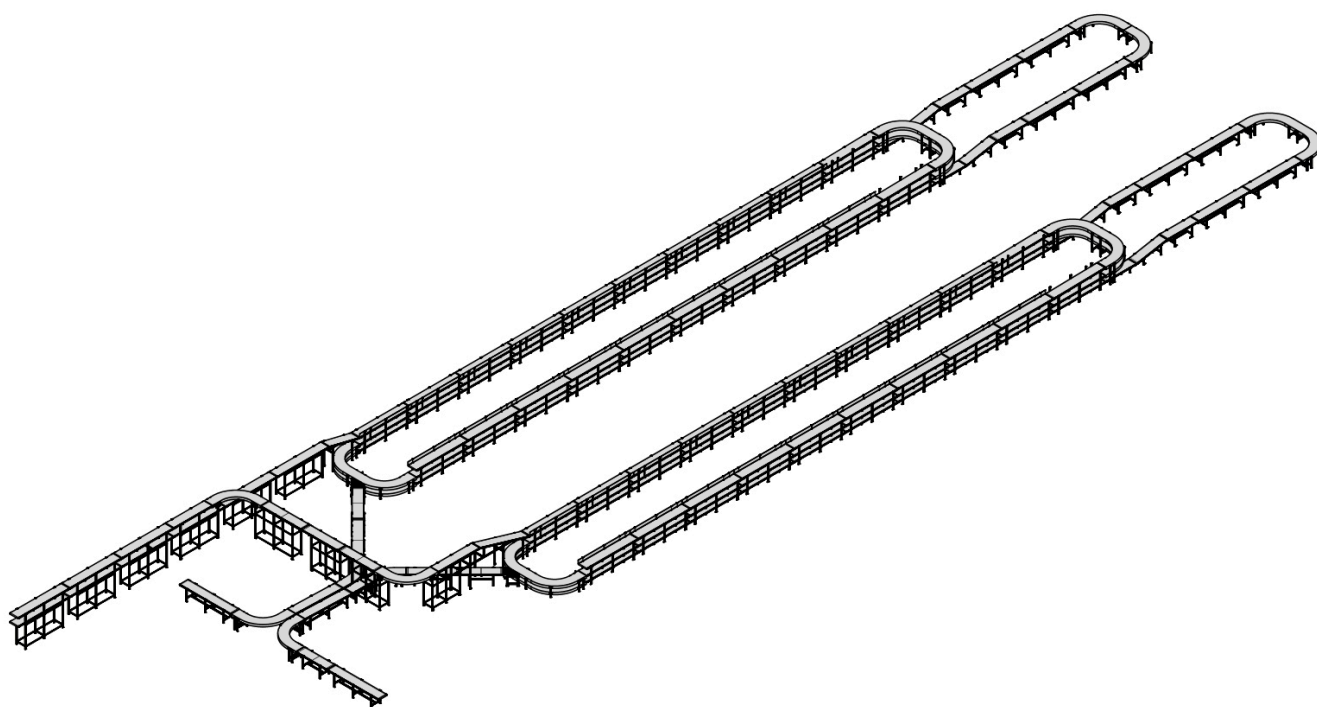



## DELIVERED SOLUTIONS

Previously delivered projects/orders

---

### WOOD INDUSTRY

#### Case

Customer wanted a solution where they would be able to move wood waste and shavings. One of the requirements was also that the track should be ascending to approx. 1.8m.

#### Solution

The solution, an L80E with slatted conveyor belt. This was then mounted on a stand which enabled the desired ascent.











- We deliver **components & solutions.**

**L-SYSTEM AB** (*Head office*)

Mörsaregatan 20  
254 66 Helsingborg  
SWEDEN  
info@l-system.se  
+46 (0)42 38 61 50

**L-SYSTEM ApS**

Roms Hule 8 (Østtårne)  
7100 Vejle  
DENMARK  
info@l-system.dk  
+45 32 26 80 81



**L-SYSTEM**